




T12260

“Teflon” Tape

1/2" x 260"

T12260 Pipe Thread “Teflon” Seal Tape

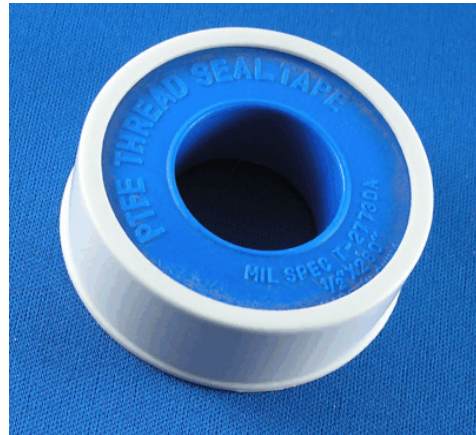

Product Applications

- Designed specifically for thread sealing iron, stainless steel, copper, brass, glass or rubber pipes to ensure leak proof connections.
- Provides chemically, inert, no hardening, non-contaminating permanent seal capable of withstanding temperatures from -375° F to 500°F

Specifications

- 4 MIL - Meets MIL Spec T-27730A
- 1/2" x 260" on Plastic Spool/Shell
- White, virgin PTFE (polytetrafluoroethylene)
- 100 rolls per box
- **Comparable to 3M No. 547**




T12260

“Teflon” Tape

1/2" x 260"

T12260 Pipe Thread “Teflon” Seal Tape

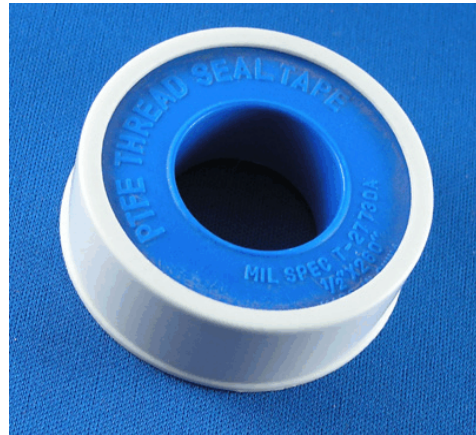


Product Applications

- Designed specifically for thread sealing iron, stainless steel, copper, brass, glass or rubber pipes to ensure leak proof connections.
- Provides chemically, inert, no hardening, non-contaminating permanent seal capable of withstanding temperatures from -375° F to 500°F

Specifications

- 4 MIL - Meets MIL Spec T-27730A
- 1/2" x 260" on Plastic Spool/Shell
- White, virgin PTFE (polytetrafluoroethylene)
- 100 rolls per box
- **Comparable to 3M No. 547**

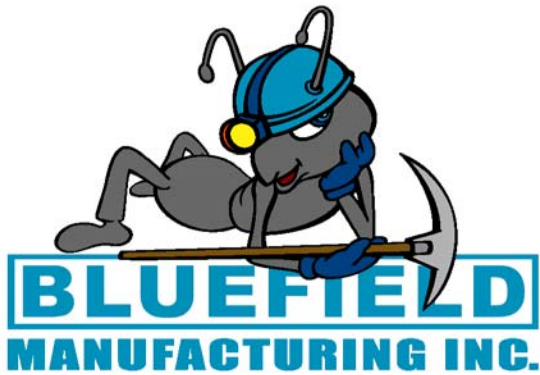


T12260

“Teflon” Tape

1/2" x 260"

T12260 Pipe Thread “Teflon” Seal Tape

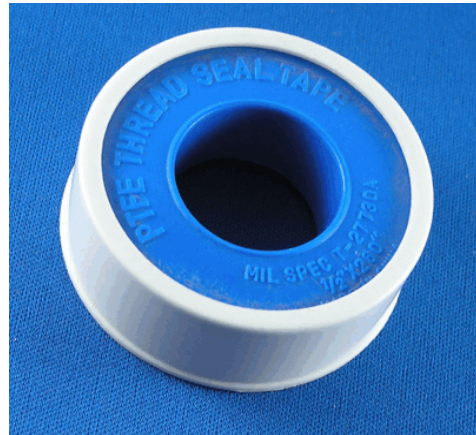

Product Applications

- Designed specifically for thread sealing iron, stainless steel, copper, brass, glass or rubber pipes to ensure leak proof connections.
- Provides chemically, inert, no hardening, non-contaminating permanent seal capable of withstanding temperatures from -375° F to 500° F

Specifications

- 4 MIL - Meets MIL Spec T-27730A
- 1/2" x 260" on Plastic Spool/Shell
- White, virgin PTFE (polytetrafluoroethylene)
- 100 rolls per box
- **Comparable to 3M No. 547**




T12260

“Teflon” Tape

1/2" x 260"

T12260 Pipe Thread “Teflon” Seal Tape

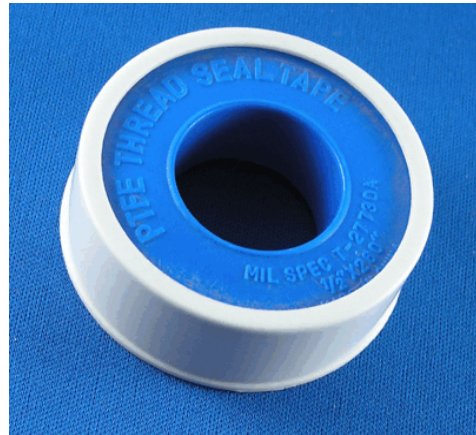

Product Applications

- Designed specifically for thread sealing iron, stainless steel, copper, brass, glass or rubber pipes to ensure leak proof connections.
- Provides chemically, inert, no hardening, non-contaminating permanent seal capable of withstanding temperatures from -375° F to 500° F

Specifications

- 4 MIL - Meets MIL Spec T-27730A
- 1/2" x 260" on Plastic Spool/Shell
- White, virgin PTFE (polytetrafluoroethylene)
- 100 rolls per box
- **Comparable to 3M No. 547**